



MODEL NUMBERS:
LF-2006-BL-10
LF-2007-BL-10

Boynton Light Fixture

Owners Manual



LF-2006-BL-10 35" DIMMABLE VANITY FIXTURE



LF-2007-BL-10 25" DIMMABLE VANITY FIXTURE

Please consult your electrician for hanging fixture and wiring.



WARNING:

To avoid electrical shock turn off power at the fuse or breaker box.



WARNING:

Wires need to be connected to driver found in canopy and should NOT be connected to power source or a short may occur



Turn off the main power at the circuit breaker before installing or servicing the light fixture to prevent possible injury from electric shock.



Make sure that all wiring conforms to local and local electrical code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections, obtain services of a qualified electrician. Use wire nuts to cap all connections.

Plastic electrical tape is not recommended.

INSTALLATION INSTRUCTIONS:

NOTE: Fixtures are suitable for up or down mounting.

1. Before beginning the installation, carefully unpack and identify all parts (refer to FIGURE 1)
Make sure the supply power is OFF.
2. Using 2 JUNCTION BOX SCREWS, securely fasten the CROSSBAR to the JUNCTION BOX.

ELECTRICAL CONNECTIONS:

3. We recommend 2 people for the rest of the installation. Connect the SUPPLY GROUND WIRE to the FIXTURE GROUND WIRE with a wire connector and then secure it to the CROSSBAR with the GREEN GROUND SCREW. Using wire connectors, connect the SUPPLY WHITE WIRE to the FIXTURE WHITE (or RIBBED) LEAD; Connect the SUPPLY BLACK (or RED) WIRE to the FIXTURE BLACK (or SMOOTH) LEAD. Wrap all connections with approved electrical tape.
4. Place the WALL PLATE over the CROSSBAR; making sure the FIXTURE SCREWS go through the mounting holes on the WALL PLATE. Secure the FIXTURE SCREWS with (2) LOCKING BALLS.
5. Place INNER GLASS SHADE in the OUTER GLASS SHADE carefully. Place over the SOCKET. Thread SOCKET RING onto the end of the SOCKET. Hand-tighten until snug. Repeat for each SHADE.

FINAL ASSEMBLY:

6. Install the LIGHT BULB (sold separately), referring to fixture labels for bulb type and maximum wattage.
The bulb quantities depends on the model of the fixture, (3 or 4, see FIGURE 2)
7. Restore power at the circuit breaker and turn light switch to activate the fixture.

FIGURE 1


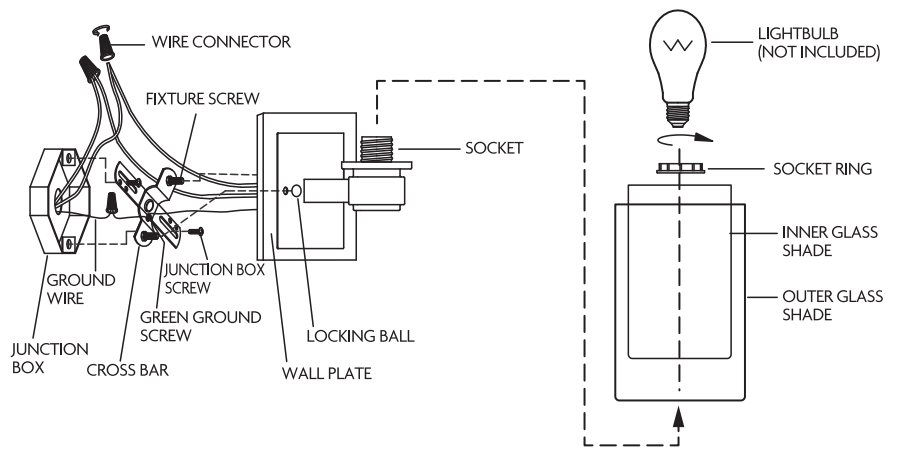


FIGURE 2

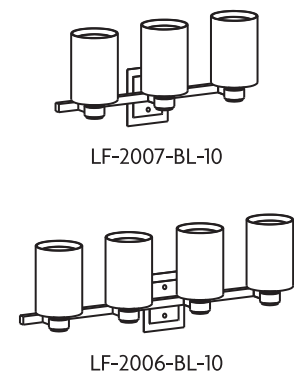

For more information, visit us at www.wagonway.com