



Vinyl Plank Flooring



FARMHOUSE



This collection characterizes rustic country elegance with a relaxed approach. The collection is inviting with its lighter tones and can be emphasized with the use of linen, stripped patterns and transitional furniture.

VARIATIONS

PROPERTIES	PRIMAFLOOR	ENVIROFLOOR
Composition	100% Virgin Vinyl	30% Recycled Material
Thickness	2-mm & 3-mm	2-mm
Dimensions	6-in x 36-in & 7-in x 48-in	6-in x 36-in & 7-in x 48-in
Wear Layer*	6-mil, 8-mil, & 12-mil	6-mil, 8-mil, & 12-mil

* Wear layer has a UV-polyurethane coating to reduce maintenance.

CERTIFICATION

DESCRIPTION	STANDARD	RESULT
Solid Vinyl Tile	ASTM F1700	Class III, Type B
Fire Response	ASTM E648 & E662	Pass (Class I)
Residual Indentation	EN 433:1994	Pass
Light Resistance	ASTM F1515	Pass
Heat Resistance	ASTM F1514	Pass
Chemical Resistance	ASTM F925	Pass
Flexibility	ASTM F137	Pass
Dimensional Stability	ASTM F2199	Pass
Overall Thickness	ASTM F386	Pass
Abrasion Resistance	ASTM F510	Pass
Sound Insulation**	ISO 7171-2	Pass
Health and Safety	FloorScore, CE, ISO 16000	Pass

** Sound properties will vary depending on the specific flooring and ceiling assembly.

INSTALLATION

Use only Wagonway 1503 or Wagonway 1520 adhesives, or equivalent.

WARRANTY


Wagonway provides a 7-year warranty for light commercial applications. Please visit www.wagonway.com for full warranty details.

LEAD TIME

The lead time is 45 days from order placement.

For more information, visit us at www.wagonway.com

AVAILABLE COLORS

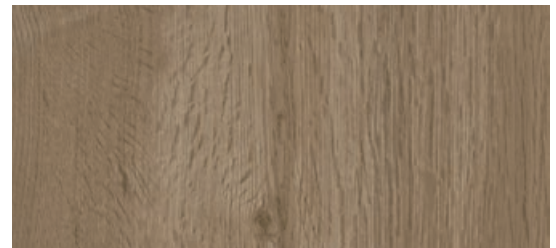

1030 Natural Oak




1015 Relaxed Ash



1011 White Oak



1004 Linen Oak

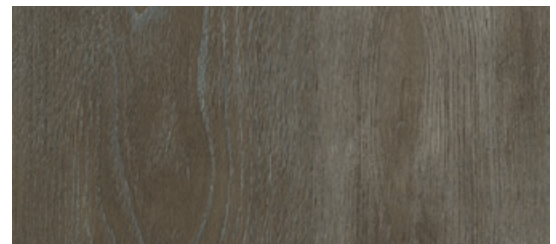

1042 Greige Oak

